



# 300Mbps Wi-Fi Router

Expand Wi-Fi Coverage




TL-WR820N

-  300Mbps
-  Easy Setup
-  IPTV
-  IPv6

# Highlights


## Reliable Network Connection

Equipped with two 5dBi antennas, TL-WR820N can enhance wireless signal transmission and reception. With 10/100Mbps Ethernet ports, it provides reliable Wi-Fi and wired connection for medium-sized homes, letting your family enjoy fast Wi-Fi together on every smartphone, tablet and laptop.

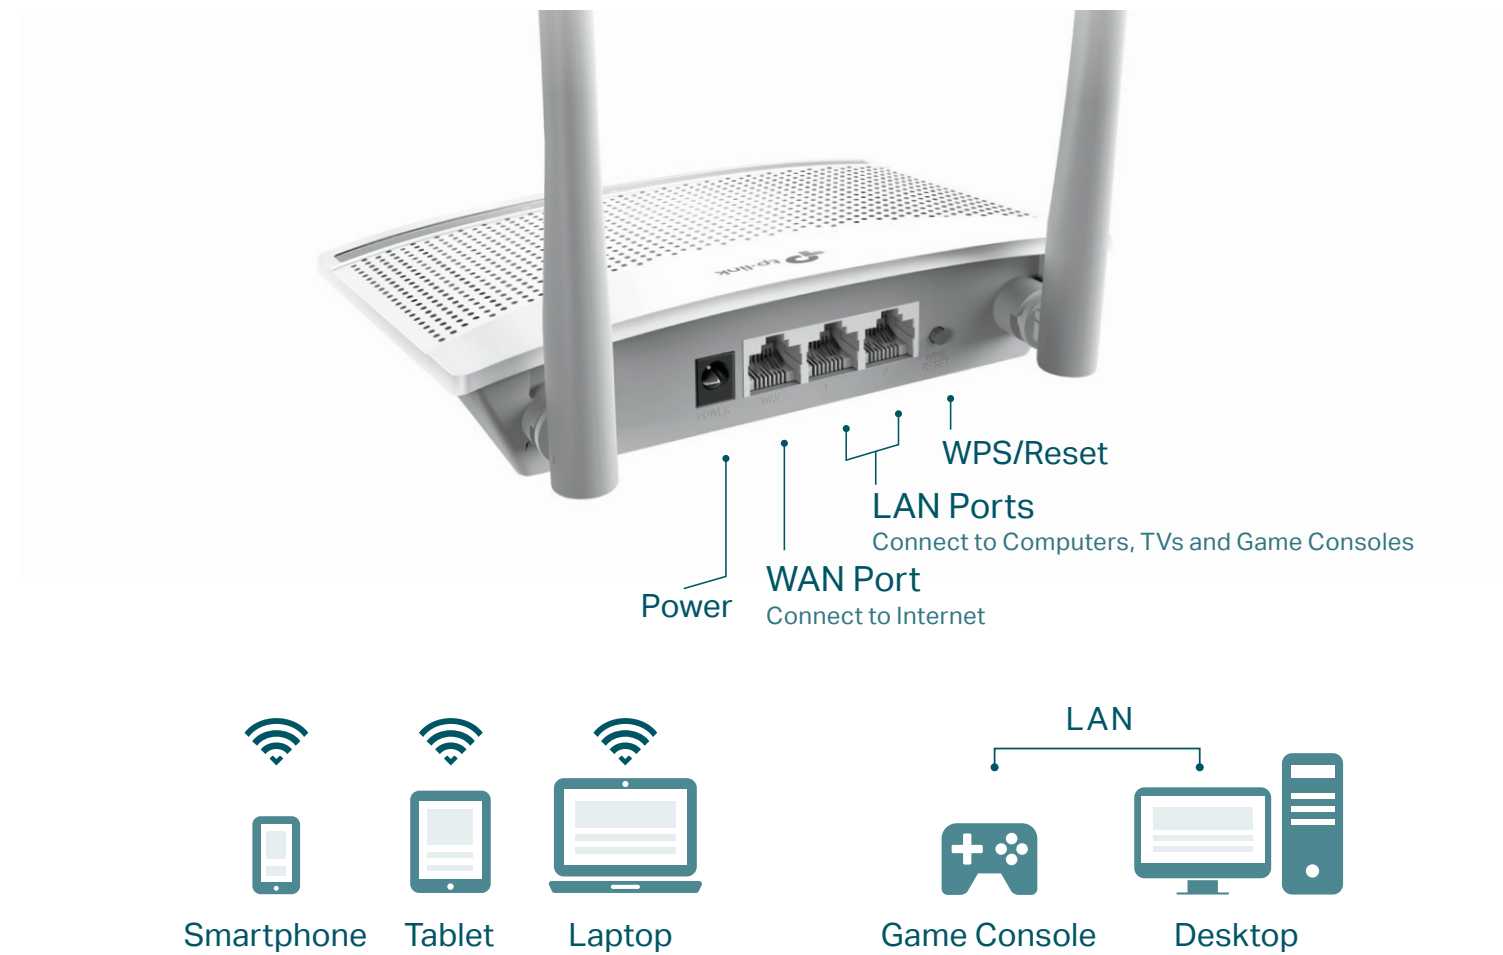

## Quick, Everyday Wi-Fi

TL-WR820N is compatible with IEEE802.11b/g/n and provides a high speed solution. Complying with the IEEE802.11n standard, TL-WR820N can deliver a speed up to 300Mbps, meeting your most demanding home networking needs, such as HD streaming, online gaming and large files downloading.

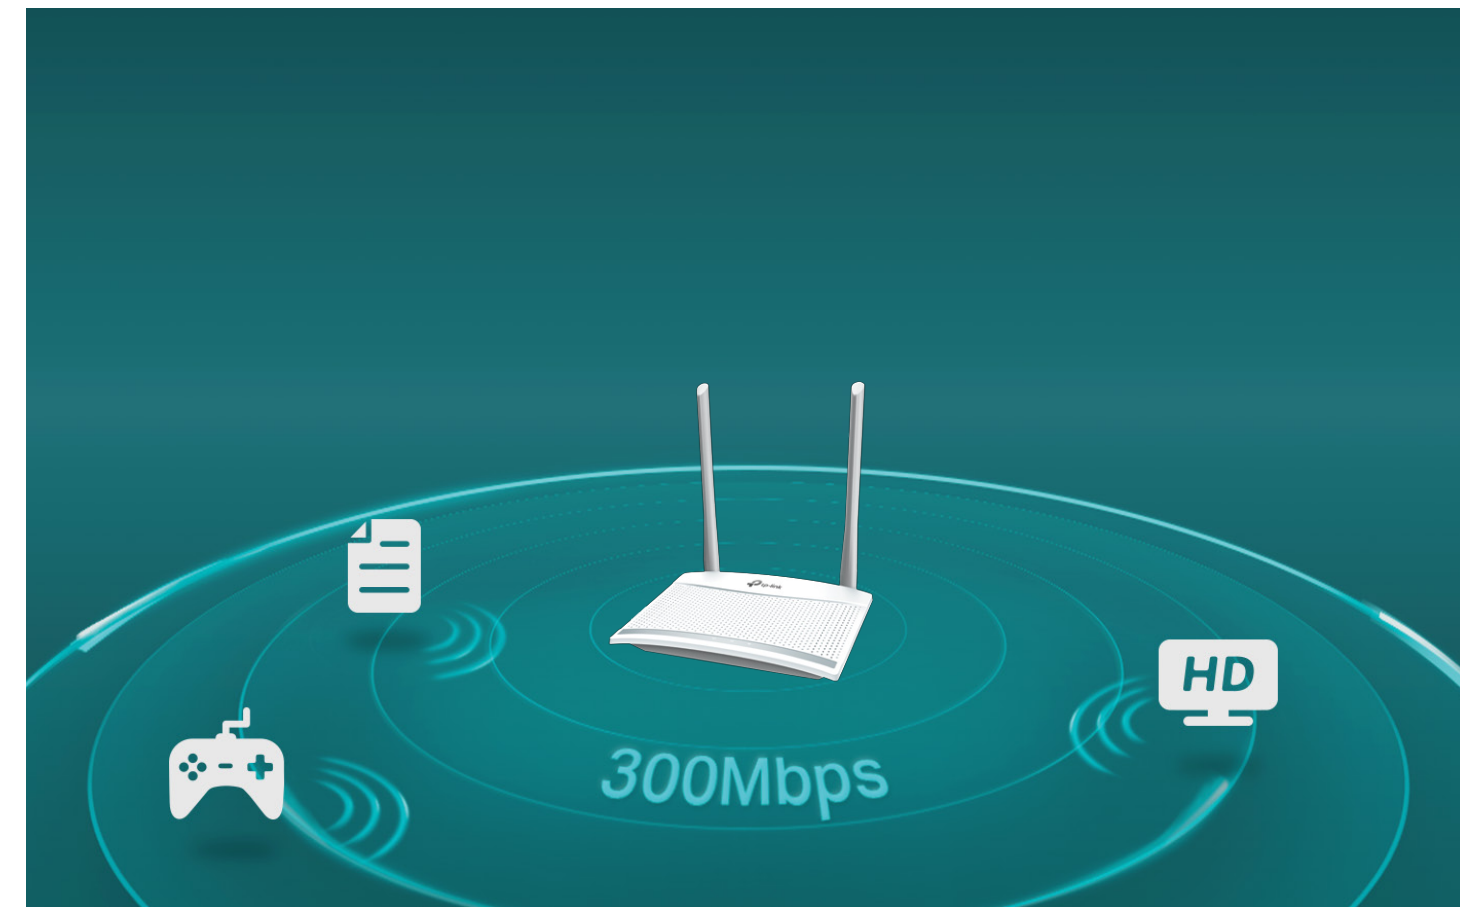

# Features



## Reliability

- **Wireless N Speed** – 300Mbps Wi-Fi speed meets your daily internet needs
- **802.11n** – Backward compatible with 802.11b/g products
- **Compatible with IPv6** – TL-WR820N allows you to enjoy IPv6 services provided by your ISP and visit IPv6 website



## Ease of Use

- **Intuitive Web UI** – Ensures quick and simple installation without hassle
- **Fast Encryption** – One-touch wireless security encryption with the WPS button
- **Parental Controls** – Manage when and how connected devices can access the internet



## Security

- **Guest Network** – Provides separate access for guests while securing the home network
- **Access Control** – Blocks unauthorized access to your network
- **SPI firewall** – Reliably safeguards your network against unknown hacking exploits, providing you a safe network environment

# Specifications

## Hardware

- Ethernet Ports: 2 10/100Mbps LAN Ports, 1 10/100Mbps WAN Port
- Buttons: WPS/Reset Button
- Antennas: 2 Fixed 5dBi Omni Directional Antennas
- External Power Supply: 5VDC / 0.6A
- Dimensions (W x D x H): 6.1 x 4.5 x 1.4 in. (154 x 114 x 36mm)



## Wireless

- Wireless Standards: IEEE 802.11n, IEEE 802.11g, IEEE 802.11b
- Frequency: 2.412~2.472GHz
- Signal Rate:
  - 11n: Up to 300Mbps(dynamic)
  - 11g: Up to 54Mbps(dynamic)
  - 11b: Up to 11Mbps(dynamic)
- Reception Sensitivity:
  - 270M: -70dBm@10% PER
  - 130M: -72dBm@10% PER
  - 108M: -74dBm@10% PER
  - 54M: -75dBm@10% PER
  - 11M: -94dBm@8% PER
  - 6M: -95dBm@8% PER
  - 1M: -96dBm@8% PER
- Wireless Function: Enable/Disable Wireless Radio, WMM, Wireless Statistics
- Wireless Security: WEP, WPA / WPA2, WPA / WPA2-PSK

# Specifications

## Software

- Working Modes: Wireless Router
- WAN Type: Dynamic IP, Static IP, PPPoE, PPTP, L2TP
- DHCP: Server, DHCP Client List
- Quality of Service: WMM
- Port Forwarding: Virtual Server, UPnP, DMZ
- Dynamic DNS: DynDns, NO-IP
- Access Control: Parental Controls, Local Management Control, Host list, Access Schedule, Rule Management
- Firewall Security: SPI Firewall, IP and MAC Address Binding
- Protocols: IPv4, IPv6
- Management: Access Control, Local Management, Remote Management
- Guest Network: 2.4GHz Guest Network

## Others

- Certification  
CE, RoHS
- System Requirements  
Microsoft Windows 10/8.1/8/7/Vista/XP/2000/NT/98SE, MAC OS, NetWare, UNIX or Linux  
  
Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser  
  
Cable or DSL Modem  
  
Subscription with an internet service provider (for internet access)
- Environment  
Operating Temperature: 0°C~40°C (32°F ~104°F)  
Storage Temperature: -40°C~70°C (-40°F ~158°F)  
Operating Humidity: 10%~90% non-condensing  
Storage Humidity: 5%~90% non-condensing
- Package Contents  
300Mbps Wi-Fi Router TL-WR820N  
  
Power Adapter  
  
RJ-45 Ethernet Cable  
  
Quick Installation Guide



For more information, please visit

<http://www.tp-link.com/en/products/details/TL-WR820N.html>

or scan the QR code left

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2019 TP-Link Technologies Co., Ltd. All rights reserved.

Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection, quality, and client condition.

[www.tp-link.com](http://www.tp-link.com)

TP-Link 300Mbps Wi-Fi Router TL-WR820N